


Rechargeable Lithium-ion Battery

GEI503040

Electrical Characteristics

Nominal Capacity	600mAh (0.2C Discharge)
Nominal Voltage	3.7V
Charge Cut-off Voltage	4.2V
Discharge Cut-off Voltage	3.0V
Internal Impedance	$\leq 150\text{m}\Omega$
Standard Charge Current	0.2C
Standard Discharge Current	0.2C
Weight	Appro. 14.8g
Rapid Charge Current	1.0C (CC/CV, 600mA, 4.2V, 6mA)
Max Discharge Current	1.0C (Ambient temperature 25°C)
Standard Charge	
Constant Current(CC) Charging at 0.2C to 4.2V	
Constant Voltage(CV) Charging at 4.2V to cut-off current $\leq 0.01\text{C}$	
Standard Discharge	
Constant Current (CC) Discharge at 0.2C to cut-off voltage of 3.0V	
General cycle Life(25 \pm 2°C)	300times
Constant current 0.2C charge to 4.2V, then constant voltage charge to current declines to 0.01C, rest 0.5h, then constant current 0.2C discharge to 3.0V, rest 0.5h. Repeat above steps till continuously discharging capacity lower than 80% of the Initial Capacities of the Cells.	

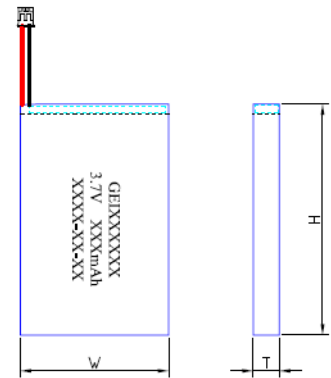

Dimension(without PCM and wire)

T: 5.3mm W: 30mm H: 40mm

(Note: Drawings just for reference)

Terminal /Connector

Soldering tabs/wires/connectors
(any special connector, please
don't hesitate to contact us.)

Operating Temperature

Charge: 0 ~ 45°C

Discharge: -20 ~ 60°C

Storage Temperature

During 1 month: -5 ~ 35°C

During 6 months: 0 ~ 35°C

Note: Information above just for your reference, more details please contact Green Energy Battery Co., Ltd.

GREEN ENERGY BATTERY Co., Ltd. Website: www.gebc-energy.com E-mail: info@greenenergy-battery.com