

Rechargeable Lithium-ion Battery Pack

ICR18650H2-1S2P

Electrical Characteristics

Nominal Capacity	5200mAh (0.2C Discharge)
Minimum Capacity	5000mAh (0.2C Discharge)
Nominal Voltage	3.7V
Charge Cut-off Voltage	4.2V
Discharge Cut-off Voltage	3.0V
Internal Impedance	≤ 200mΩ
Standard Charge Current	0.2C
Standard Discharge Current	0.2C
Weight	Appro. 95g
Rapid Charge Current	1.0C (CC/CV, 5200mA, 4.2V, 52mA)
Max Discharge Current	1.0C (Ambient temperature 25°C)

Standard Charge


Constant Current(CC) Charging at 0.2C to 4.2V
 Constant Voltage(CV) Charging at 4.2V to cut-off current ≤ 0.01C

Standard Discharge

Constant Current (CC) Discharge at 0.2C to cut-off voltage of 3.0V

General cycle Life(25±2°C) 300times

Constant current 0.2C charge to 4.2V, then constant voltage charge to current declines to 0.01C, rest 0.5h, then constant current 0.2C discharge to 3.0V, rest 0.5h. Repeat above steps till continuously discharging capacity lower than 70% of the Initial Capacities of the Cells.

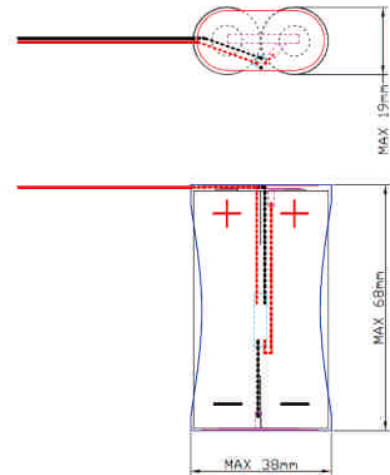

Thickness: 19mm Width: 38mm Height: 68mm

(Note: Drawings just for reference)

Terminal / Connector

Soldering tabs/wires/connectors
 (any special connector, please don't hesitate to contact us.)

Operating Temperature

Charge: 0 ~ 45°C
 Discharge: -20 ~ 60°C

Storage Temperature

During 1 month: -5 ~ 35°C
 During 6 months: 0 ~ 35°C

Note: Information above just for your reference, more details please contact Green Energy Battery Co., Ltd.